


JT-346-AX AS RIBBON MIC MATCHING TRANSFORMER

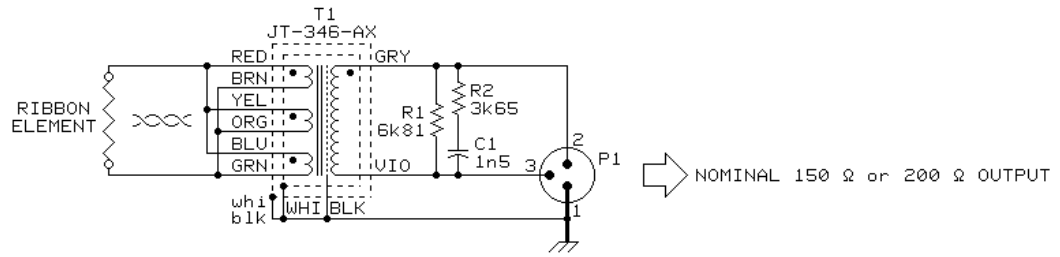

Technical Data: Voltage gain = $12.3 \times = 22$ dB
 Noise Figure = 4.4 dB for 1 Ω ribbon, 6.5 dB for 0.5 Ω ribbon
 Actual output impedance = 377 Ω for 1 Ω ribbon, 310 Ω for 0.5 Ω ribbon

NOTE: TIGHTLY TWIST ALL PRIMARY WIRES FROM ELEMENT TO T1 (shown as $\infty\infty$)
 TO MINIMIZE HUM PICKUP FROM EXTERNAL MAGNETIC FIELDS.

jensen	AS067
	01/22/97
7135 HAYVENHURST AVE. VAN NUYS, CALIFORNIA 91406 (818) 374-5857	