



JT-DB-E CONVERTS CONSUMER STEREO INPUTS TO MONO BALANCED MIC OUTPUT

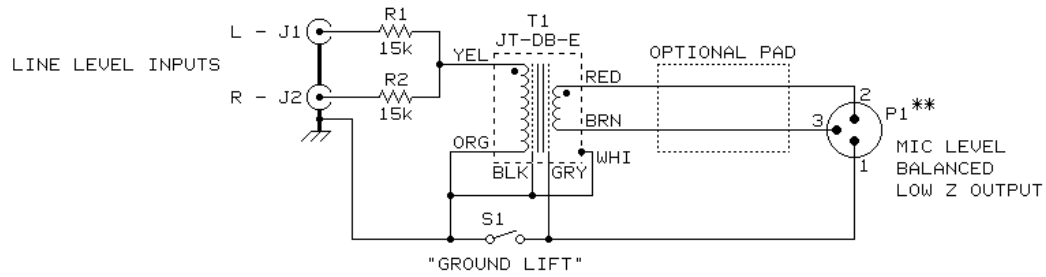

** THE HOUSING OF P1 SHOULD BE INSULATED FROM THE CHASSIS; OTHERWISE, IF THE MATING CONNECTOR USED HAS PIN 1 TIED TO THE SHELL, THE GROUND LIFT SWITCH WILL HAVE NO EFFECT.

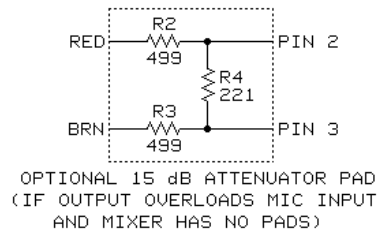

OPTIONAL 15 dB ATTENUATOR PAD
(IF OUTPUT OVERLOADS MIC INPUT
AND MIXER HAS NO PADS)

jensen	AS078
	01/14/98
7135 HAYVENHURST AVE. VAN NUYS, CALIFORNIA 91406 (818) 374-5857	